

Lightbars

IONNIC LED Hybrid-Bar

NEW




LSB-0110


12V 30V IP67 5Yrs

- Half beacon half lightbar, the IONNIC Hybrid-Bar bridges the gap between the two groups.
- 26 flash patterns.
- Magnetic version features cigar plug with integrated on/off & pattern select switches.
- Latest ultra bright 3W LED technology.
- Robust housing and lens.
- Can be synchronised.
- Multi-voltage.
- Full 360° light dispersion.
- Environmentally sealed – IP67.
- 5 year warranty.

Operational Voltage :	12-30V
Max. Current Draw :	6A @ 12V
Flash Patterns :	26
Mount :	4 x M5 Bolts / Magnetic
Lens :	Polycarbonate
Base :	Polycarbonate
Cable Length :	4 Bolt 0.5m Magnetic 2.9m
Weight :	1.0kg
Light Source :	24 x 3W LEDs
Approvals :	SAE J845 Class1
Ingress Protection :	IP67
Operating Temperature :	-40°C to 60°C

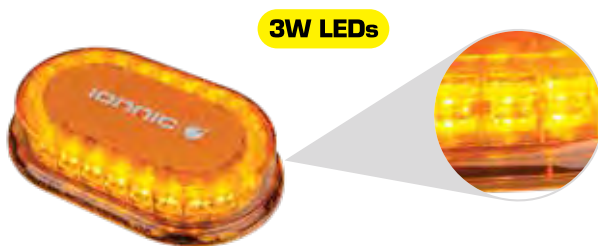

3W LEDs



IONNIC LED Hybrid-Bar – 4 Bolt NEW

Amber

LSB-0110


Supplied with 4 x M5 bolts, nuts, split ring & washers.



3W LEDs

MAX 112 GMW

On/off & pattern select switches



IONNIC LED Hybrid-Bar – Magnetic NEW

Amber

LSB-0110-M